

# Multifunction counter board, optically isolated, fast counter inputs – programmable functions, for CompactPCI Serial

**NEW\***

## CPCIs-1711

Available functions: incremental counter, SSI Synchronous Serial Interface, counter/timer, pulse acquisition, frequency, pulse width, period duration, velocity measurement, PWM, BiSS-Master, digital I/O, Sin/Cos, EnDat 2.2 ...


Function selection through software

Optical isolation

Inputs and outputs: RS422, TTL, 24 V

Customised functions

Extended temperature range -40 °C to +85 °C

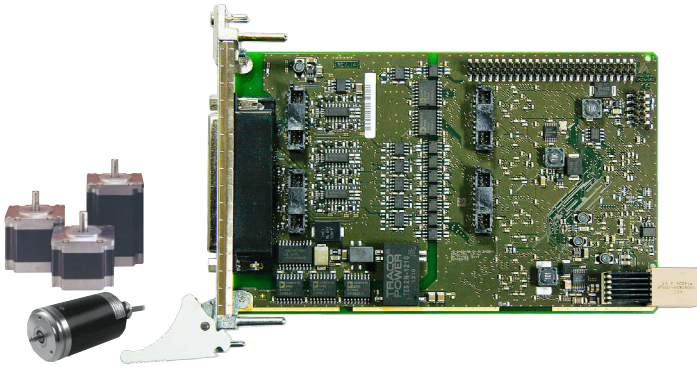

Also for **PCI EXPRESS™**  
See APCI-1711, page 128

Also for **PCI**  
see APCI-1710  
page 166

Also for **CompactPCI™**  
see CPCI-1710  
page 234

The board CPCIs-1711 is a fast multifunction and multi-channel counter board for CompactPCI Serial. The strengths of this board are its wide range of applications and high precision and reliability in harsh industrial environment.

With this board you can realise many different applications on the same hardware base. The board is supplied with a pool of functions which provides the user with maximum efficiency yet minimum space and parts requirement. The functions are individually configured for each channel through the supplied software. The flexible programming facilities on this board allow many different user applications to be quickly and easily developed and reconfigured as further requirements arise. Thanks to the FPGA board structure, further counting applications can be realised through software adaptation. Contact us!

### Features

- 32-bit data access
- RS422 driver 5 MHz (up to 20 MHz on request)
- With RS422/TTL input/output signals (CPCIs-1711) or 24 V input signals (CPCIs-1711-24V)
- Four onboard function modules

### Functions

- Incremental counter for the acquisition of incremental encoders (90° phase-shifted signals)
- BiSS-Master (B and C mode)
- SSI Synchronous Serial Interface. The SSI function is an interface for systems which allow an absolute position information via serial data transfer.
- Counter/timer (82C54)
- Pulse acquisition
- Frequency measurement
- Pulse width modulation (PWM)
- Period duration measurement
- Velocity measurement
- Digital inputs and outputs
- Edge time measurement (ETM)
- Parallel interface
- Sin/Cos (1 V<sub>SS</sub>, 11 μA<sub>SS</sub>)
- EnDat 2.2
- Customised functions

### Available channels on one function module

- 4 channels, programmable either as digital inputs or outputs, optically isolated, RS422
- 3 channels, digital inputs, optically isolated, 24 V
- 1 digital power outputs, optically isolated, 24 V

### Additional channels

- 28 TTL I/O, without optical isolation

### Versions

	RS422/ TTL- I/O	24 V inputs	5 V inputs	24 V outputs	TTL I/O
<b>CPCIs-1711</b>	16	12	–	4	28
<b>CPCIs-1711-24V</b>	–	28	–	4	28
<b>CPCIs-1711-5V-I</b>	16		12	4	28

### Safety features

- Creeping distance IEC 61010-1
- Optical isolation 1000 V
- Noise neutralisation of the PC supply

### Applications

- Event counting
- Position acquisition
- Motion control
- Batch counting
- ...

### Software drivers

A CD-ROM with the following software and programming samples is supplied with the board.

### Standard drivers for:

- Linux
- 32-bit drivers for Windows 8 / 7 / Vista / XP / 2000
- Signed 64-bit drivers for Windows 8 / 7 / XP
- Real-time use with Linux and Windows on request

### Drivers and samples for the following compilers and software packages:

- Microsoft VC++ • Borland C++ 5.01

### On request:

Further operating systems, compilers and samples.

Driver download: [www.addi-data.com/downloads](http://www.addi-data.com/downloads)



\* Preliminary  
product information

## Specifications\*

## Free programming of the functions

- Acquisition of incremental encoders (1 x 32-bit or 2 x 16-bit)
- SSI (max. 3 encoders per module)
- Counter/Timer (3 counters similar to 82C54)
- Pulse counter (4 x 32-bit counters per module)
- Chronos (chronometer)
- TOR (pulse counter with time slices, ...)
- Digital I/O (8 I/O, 24 V, TTL, RS422)
- PWM (pulse width modulation, 2 x per module)
- BiSS-Master (B and C mode)
- ETM (Timer interface for period duration measurement, edge time, ...)
- TTL (TTL I/O without isolation)
- Parallel Interface
- EnDat 2.2
- Sin/Cos
- Customised functions

## Signals

Digital I/O signals, TTL or RS422, 24 V

## Inputs

## Differential inputs or outputs (A, B, C, D)

Differential inputs, RS422:	16 (can be used as inputs or outputs)
Nominal voltage:	3.3 VDC
Common mode range:	+12 / -7 V
Input sensitivity:	200 mV
Input hysteresis:	50 mV
Input impedance:	12 k $\Omega$
Terminal resistor:	120 $\Omega$ (not supplied)
Max. input frequency:	CPCIs-1711: 5 MHz (at nominal voltage) up to 20 MHz on request!

## Mass-related inputs, 24 V (E, F, G):

Number of inputs:	12
Nominal voltage:	24 VDC
Logic input levels:	Unominal: 24 V UH max.: 30 V UH min.: 19 V UL max.: 14 V UL min.: 0 V

Maximal input frequency: 1 MHz (at nominal voltage) depending on the function

## Outputs

Nominal voltage:	3.3 VDC
Maximum output frequency:	5 MHz (diff. outputs)
Max. number of outputs:	16 (if they are not used as diff. inputs)

## Digital outputs, 24 V (H)

Output type:	High-side (load to ground)
Number of outputs:	4
Nominal voltage:	24 VDC
Supply voltage range:	4.75 V to 30 VDC (via 24 V ext. pin)
Maximum current:	90 mA per output / 270 mA total current limit (PTC)
Overtemperature:	165 °C (all outputs switch off)

## Technical data CPCIs-1711-24 V version

24 V inputs (channels A to G).  
This board version is intended for the  
connection of 24 V encoders.  
Only 24 V signals can be connected to the inputs.

Nominal voltage:	24 VDC
Max. input frequency:	1 MHz (at nominal voltage) depending on the function
Logic input levels : (Standard)	Unominal: 24 V UH max.: 30 V UH min.: 18 V UL max.: 16 V UL min.: 0 V

All functions using channels A, B, C, D as outputs cannot be used.  
See the manuals of the functions!

## Safety

Optical isolation: 1000 V

## EMC – Electromagnetic compatibility

The product complies with the European EMC directive. The tests were carried out by a certified EMC laboratory in accordance with the norm from the EN 61326 series (IEC 61326). The limit values as set out by the European EMC directive for an industrial environment are complied with. The respective EMC test report is available on request.

## PC system requirements and environmental conditions

Dimensions:	160 x 100 mm
System bus:	PCI Express according CompactPCI Serial specification PICMG CPCI-S.0 R1.0
Space required:	1 x CompactPCI Serial slot for digital I/O 1 x slot opening for TTL I/O with FB1711
Operating voltage:	+12 V, $\pm$ 5 %
Current consumption:	230 mA, $\pm$ 10 %
Front connector:	78-pin D-Sub female connector
Additional connector:	50-pin D-Sub male connector
Temperature range:	from -40 °C to +85 °C
MTBF	in preparation

## Ordering information

## CPCIs-1711

Multifunction counter board, optically isolated, fast counter inputs – programmable functionality, for CompactPCI Serial.  
Incl. technical description and software drivers.

<b>CPCIs-1711:</b>	Multifunction counter board, optical isolated
<b>CPCIs-1711-24V:</b>	24 V instead of RS422 / TTL I/O (A, B, C, D)
<b>CPCIs-1711-5V-I:</b>	5 V inputs instead of 24 V (E, F, G)

## Option

**Opt. 5V:** Outputs 3.3 V instead of 24 V (H0, H1, H2, H3)

## Accessories

<b>PX8001:</b>	3-row screw terminal panel with housing for DIN rail
<b>ST1711-50:</b>	Standard round cable, shielded, twisted pairs, 2 m, 78-pin male connector to 50-pin male connector

## For the TTL I/O function

<b>ST370-16:</b>	Standard round cable, shielded, twisted pairs, 2 m
<b>FB1711:</b>	Ribbon cable (included in delivery)

## For the Sin/Cos function

<b>EM-SINCOS-11<math>\mu</math>APP:</b>	Extension module, 2 x 11 $\mu$ A <sub>pp</sub> inputs, 1 dig. output, 24 V
<b>EM-SINCOS-1VPP:</b>	Extension module, 2 x 1 V <sub>pp</sub> inputs, 1 dig. output, 24 V
<b>ST1711-50-37:</b>	Y-cable, round, shielded, twisted pairs, 78-pin D-Sub male connector to 50-pin D-Sub male connector and 37-pin D-Sub male connector
<b>PX901-ZG:</b>	Screw terminal panel for DIN rail

\* Preliminary product information