


Screw terminal panel for DIN rail

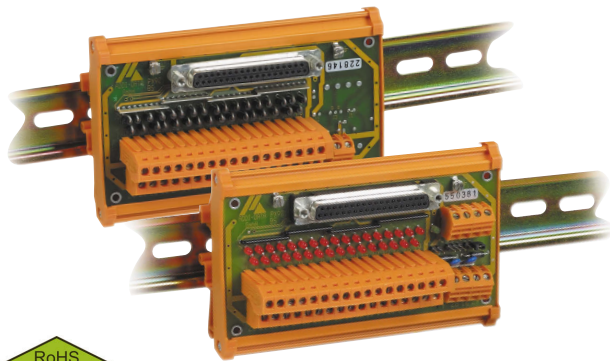

The screw terminal panel PX901-xx is used for the connection of maximum 32 signal or signal-reference lines.

ADDI-DATA boards can be connected through 37-pin D-Sub female connector with our standard cables of STxxx series.

The housing of the female connector is connected with two ground terminals so that the board is additionally earthed for more security. All components of the board are enclosed in an earthing strip also connected to the ground terminals.

Each terminal is directly connected to one pin of the 37-pin D-Sub female connector. Designations on terminals indicate respective connections for the 37-pin D-Sub female connector.

The PX901-D version is equipped with LEDs which are ideal for status display when working with ADDI-DATA digital 24 V I/O boards.

The PX901-A version is fitted with transil diodes for analog signals, but without LEDs.

An additional 4-pin terminal is available in order to be able to connect more than one 24 V operating voltage and ground line.

The 24 V or the ground terminal can be connected very easily through wire wrap to the 4-pin terminal.

The 24 V operating voltage lines are additionally protected against over-voltage through varistors and transil diodes.

Features

- Connection of up to 32 signal lines
- Separate ground connections
- Connection through screw terminals
- 2 rows of terminals
- Terminals can be labelled
- Additional 4-pin terminal for connecting the ground or the supply voltage
- With housing for mounting on a standard DIN rail
- All terminals intended for large conductor cross sections: up to 2.5 mm²

PX901

32 terminals for signal lines

LED status indication for digital signals

Transil diodes for analog signals

DIN-rail mounting

Direct connection to ADDI-DATA boards

Safety features

- Overvoltage protection of the 24 V supply terminals through varistors and transil diodes

Applications


- Process control
- Industrial measuring
- Acquisition of sensor data
- Signal analysis

Specifications

Signal line terminals:	32 for the connection of peripherals
Additional terminals:	– 4 for feeding the external operating voltage (digital I/O) – 2 for the connection of ground lines
status indication:	32 LEDs for status indication, 1 LED for status display of the operating voltage (PX901-D)
Safety features:	Varistors and transil diodes
Connector:	37-pin D-Sub female connector
Dimensions of the board:	130 x 70 x 35 mm (L x W x H)
Dimensions with housing:	132 x 87 x 70 mm (L x W x H)
Temperature range:	0-60 °C

Example:

Connection of a digital input board to the screw terminal panel PX901-DG

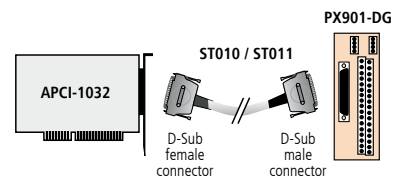

Ordering information

PX901

Screw terminal panel. Incl. technical description.

Versions

PX901-D: For digital boards, with status indication through LEDs and the Ethernet systems MSX-E312x and MSX-E3701-DIO

PX901-DG: Same as PX901-D, with housing for mounting on DIN rail

PX901-A: For analog boards, with transil diodes

PX901-AG: Same as PX901-A, with housing for mounting on DIN rail

PX901-ZG: – For the counter boards APCle-1711 and CPCIs-1711 (function Sin/Cos)

– for connecting digital I/O to analog PC boards

– for the relay boards (digital inputs) APCle-2200 and APCI-2200

With housing for DIN-rail mounting

Accessories please order separately!

ST010: Standard round cable, shielded, twisted pairs, 2 m

ST011: Standard round cable, shielded, twisted pairs, 5 m