

Digital input board, 32 isolated channels, 24 V



PA 1000

32 digital inputs, 24 V
incl. 14 interruptible inputs

Optical isolation 1000 V

Voltage reversal protection

Timer



Features

Digital inputs

- 32 isolated input channels, 24 V, incl. 14 interruptible
- 1 channel can be dedicated to the monitoring of the 24 V supply voltage (channel 16)
- Address range adjustable through DIP switches
- 16-bit or 8-bit data bus access

Safety features

- Optical isolation 1000 V
- Creeping distance IEC 61010-1 (VDE411-1)
- Voltage reversal protection
- All inputs are filtered
- Protection against fast transients (Burst), overvoltage, electrostatic discharge and high-frequency EMI
- Additional noise suppression on the interrupt lines

EMC tested acc. to 89/336/EEC

- IEC 61326: electrical equipment for measurement, control and laboratory use

Applications

- Digital monitoring
- Signal switching
- Optical isolation between PC and peripheral
- Automatic test equipment
- Equipment monitoring
- Machine interfacing
- ...

Software drivers

A CD-ROM with the following software and programming examples is supplied with the board.

Standard drivers for:

Windows XP/2000/NT/98/95, Windows 3.11, MS-DOS
Real-time drivers for Windows XP/2000/NT

Drivers for the following application software:

LabVIEW 5.01

Samples for the following compilers:


- Microsoft VC++ 5.0
- Microsoft C 6.0
- Borland C++ 5.01
- Borland C 3.1
- Visual Basic 5.0
- Visual Basic 1.0
- Delphi 1
- Delphi 4
- Turbo Pascal 7.0

On request:

- Visual Basic 4.0
- LabWindows/VI 5.01

Current driver list on the web: www.addi-data.com

Protective circuitry for the input channels

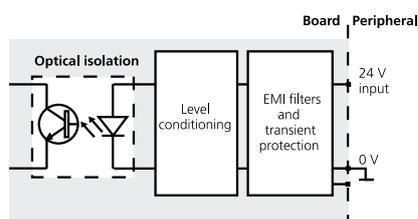

Digital input board, 32 isolated channels, 24 V

Specifications

Digital inputs

Number of inputs:	32
Optical isolation:	through optical couplers, 1000 V from the PC to the peripheral
Interruptible inputs:	14 of the 32 digital inputs
Interrupt comparison logic:	AND and OR mode; OR priority
Interrupt lines:	IRQ 3, 5 for XT IRQ 10, 11 12, 14, 15 for AT
Nominal voltage:	24 V external
Input current at 24 V:	6 mA typ.
Logic input level:	U nominal: 24 V UH max.: 30 V/current 9 mA typ. UH min.: 19 V/current 2 mA typ. UL max.: 14 V/current 0,7 mA typ. UL min.: 0 V/current 0 mA typ.
Logic input level for the 24 V monitoring: (channel 16, selectable through jumper)	U nominal: 24 V UH max.: 30 V/current 10 mA typ. UH min.: 20 V/current 3 mA typ. UL max.: 18 V/current 1 mA typ. UL min.: 0 V/current 0 mA typ.
Signal delay (at 24 V):	channel 1-16: 70 µs channel 17-32: 40 µs
Maximum input frequency:	5 kHz (at 24 V)

EMC – Electromagnetic compatibility

The product complies with the European EMC directive. The tests were carried out by a certified EMC laboratory in accordance with the norm from the EN 61326 series (IEC 61326). The limit values as set out by the European EMC directive for an industrial environment are complied with. The respective EMC test report is available on request.

Physical and environmental conditions


Dimensions:	156 x 99 mm
System bus:	ISA
Place required:	1 XT or AT slot
Operating voltage:	+5 V, ±5 % from PC
Current consumption:	194 mA ±10 mA typ.
Front connector:	37-pin SUB-D male connector
Temperature range:	0 to 60 °C (with forced cooling)

Terminal panel PX 901-DG
with cable ST010



PA 1000

Simplified block diagram

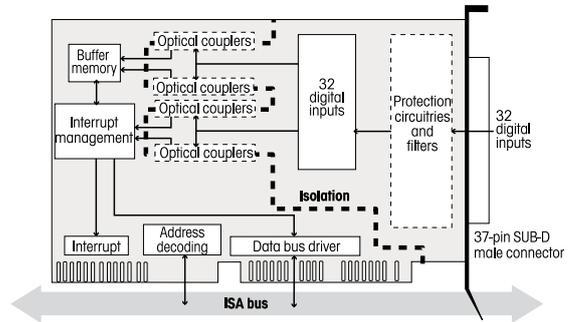


Pin assignment – 37-pin SUB-D male connector

Reserve	19	37	Dig. input 32
Dig. input 31	18	36	Dig. input 30
Dig. input 29	17	35	Dig. input 28
Dig. input 27	16	34	Dig. input 26
Dig. input 25	15	33	Dig. input 24
Dig. input 23	14	32	Dig. input 22
Dig. input 21	13	31	Dig. input 20
Dig. input 19	12	30	Dig. input 18
Dig. input 17	11	29	0 V ext.
0 V ext.	10	28	(0 V ext.)*
(0 V ext.)*	9	27	Dig. input 16
Dig. input 15	8	26	Dig. input 14
Dig. input 13	7	25	Dig. input 12
Dig. input 11	6	24	Dig. input 10
Dig. input 9	5	23	Dig. input 8
Dig. input 7	4	22	Dig. input 6
Dig. input 5	3	21	Dig. input 4
Dig. input 3	2	20	Dig. input 2
Dig. input 1	1		

* No signal connected at delivery.
intended for current return lines

ADDI-DATA connection

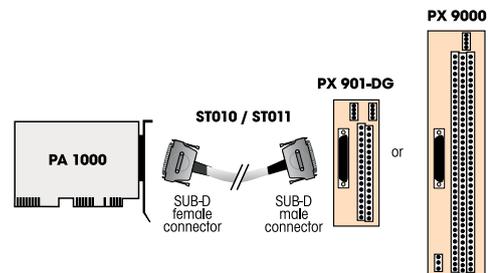

Ordering information

PA 1000

Digital input board, 32 isolated channels, 24 V. Incl. technical description and software drivers.

Connection

- PX 901-D:** Screw terminal panel, LED status display
- PX 901-DG:** Screw terminal panel for DIN rail, LED status display
- PX 9000:** 3-row screw terminal panel for DIN rail, LED status display

- ST010:** Standard round cable, shielded, twisted pairs, 2 m
- ST011:** Standard round cable, shielded, twisted pairs, 5 m